

SemaLink

SemaLink Ku-OMUX WR 75




MULTIPLEXERS

- To filter and combine 2 different signals in RF output for TCR subsystem

FEATURES

- Available for different frequency bands
- Multipaction and corona free design
- Manufactured using space qualified materials
- Structural mass optimization for optimum solutions customization upon customer request
- Fully space qualified

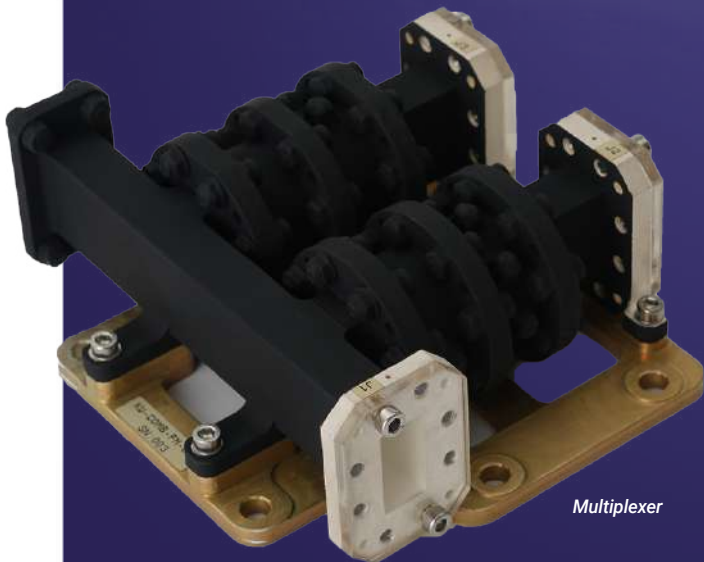

Multiplexer

OVERVIEW

Waveguide components, which aim to transmit RF signals with low loss or which allows transmission of high power RF signals, are qualified for geostationary satellites. Several different waveguide products with different specifications are available with the possibility of customization according to specific customer or mission requirements. These products can be used to combine, filter or separate RF signals.



SPECIFICATIONS

MULTIPLEXERS

Operating Frequency	Program Specific
VSWR	>1.119:1
Insertion Loss	< 0.5 dB
Isolation	> 28 dB
Interface	WR 75
Mass	Frequency Dependent
Size	Frequency Dependent
Flight Heritage	TÜRKSAT 6A



SPACE QUALIFIED

Fully space qualified equipment for geostationary satellites.



CUSTOMIZABLE

Designed and optimized according to customer needs.



HIGH RELIABILITY

Designed for more than 15 years of lifetime in geostationary orbit with lowest cost possible.



LOW MASS

Mechanical design is optimized for mass to meet mission specific requirements.